


NR 70

Level regulator for tank insert

serial No. Date
IN - GB - 105 - 07/23

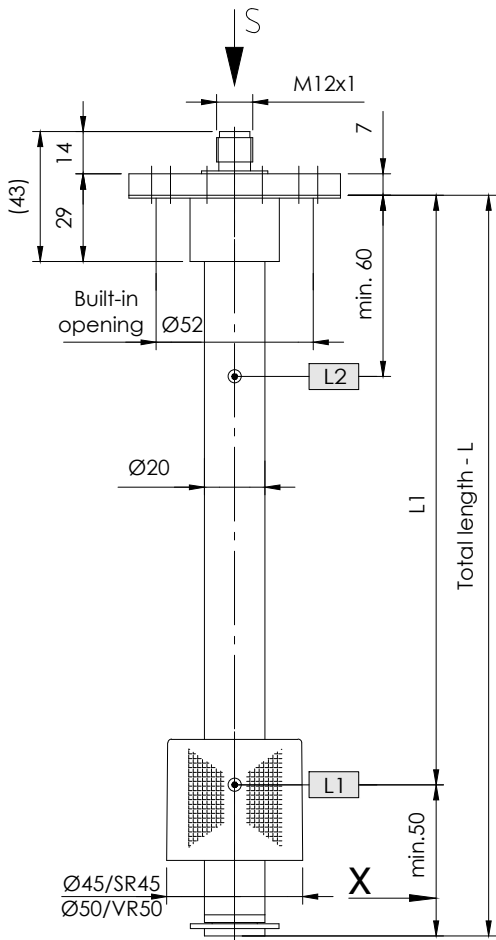

Minimum distance of the contacts
see data sheet IN-D-003/004.

$X = L1 - L5$ (01/03) + 1 Thermal contact + 70mm
 $L1 - L4$ (02/04) + 1 Thermal contact + 80mm
 $L1 - L5$ + Pt100 / 1000 + 60mm
 When ordering Pt100 / 1000
 indication of connection II / III / IV- conductors.

Order code

Specimen order

NR70-SR45-L370-03-L1/300/S-T70Ö-MS-M12-24V

Tank connection:
Flange NR70

Float type
SR45
VR50

Total length-L
of switching tube(mm)

Level contact type
OK= cordless contact
(max.500mm)
01 = fixed, plain
02 = fixed, changeover
03 = adjustable, plain
04 = adjustable, changeover

Switching point L1-L3/
mm from sealing edge
Ö = break
S = make
W = changeover
Function with
increasing level


Pt100
Pt1000
Thermal contact
T10Ö
T40Ö
T50Ö
T60Ö (S)
T70Ö (S) (preferred
break)
T80Ö (S)
T90Ö
(Indicate T1... - T2... for
two thermal contacts)

Plug socket connector:
M12 - 24V
3+PE-DIN 43650
3 pol. + PE
6+PE-DIN 43651
6 pol. + PE
HAN I
HAN II

Operating voltage
VDC 10-36 = 24V
VAC 10-230 = 250V

Execution:
MS - Brass
VA - Stainless steel
Switching tube, Flange
VAPA - Flange-PA
- Switching tube-VA
(PA - Polyamide)

View S
Flange NR70 with Plug connection

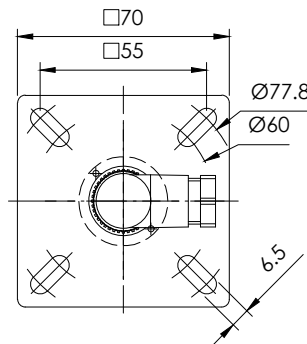

Description

The level regulator type NR 70 for tank insert is a solenoid switch operating without contact with the function of monitoring and regulating liquid levels and temperatures. The switching tube contains bistable protective gas contacts. They may be fixed or alternatively mounted as an adjustable contact cartridge on a perforated strip. For fixed contacts, the contact intervals and their functions must be given. Plain contact cartridges can be subsequently adjusted for height. The function of make or break can then be altered by turning the cartridge through 180° degrees. The permanent magnet built into the float switches the contacts when the level changes. The switching difference (hysteresis) is 4 mm. For temperature monitoring and regulation, thermal elements such as Pt100 / Pt1000 and thermal contacts can be additionally incorporated. The level controller is maintenance - free when nondeposit media are used. For inductive loads, a protective circuit must be provided (free-wheeling diode/RC element). The device must only be installed by specialists.

Max. viscosity 320mm²/S.

Technical data

Switching tube	Brass (MS), Stainless steel (VA) max. L = 2000mm
Connection flange	NR70 Stainless steel (VA) or Polyamide (PA) with flat seal
Nominal pressure	1 bar max.
Temperature of medium	100°C max.
Float	Hard PU, Type: SR45 Stainless steel, Type: VR50
Medium density	0,80 kg/dm ³ min.
Level contacts	bistable make / break / changeover optional fixed or adjustable 250V AC /DC max. Datasheet: IN-GB-003/004
Operating voltage	Pt100 / Pt1000 DIN EN 60751 Datasheet: IN-GB-005
Contact details	Switchpoint: ± 5K Hysteresis: 20K ± 5K
Thermal elements	max. 5 can be incorporated
Thermal contacts	vertical ± 30°
Number of functions	
Mounting position	

Technical data



GOLDAMMER
REGELUNGSTECHNIK GMBH

SCHÖLLERSHEIDER STR. 15
POSTFACH 10 02 17
D-40802 METTMANN

TELEFON 02104/12093
TELEFAX 02104/12028

www.Goldammer-Regelungstechnik.com
info@goldammer-regelungstechnik.com

Level regulator

Plug variants and terminal pin assignment

serial No. Date
IN - GB - 105 - 07/23

Standard pin assignment
Function with increasing level / temperature





Plug connection
M12 IP67
5-polig

Plug connection
3+PE IP65
EN 175301-803
(DIN 43650)


Plug connection
3 pol.+PE
IP67

Plug connection
6+PE IP65
EN 175201-804
(DIN 43651)




Plug connection
6 pol.+PE
IP67

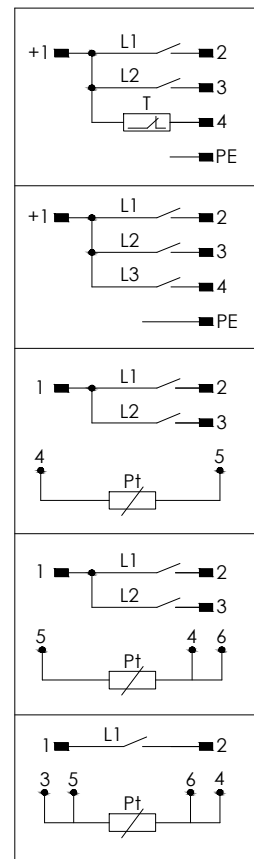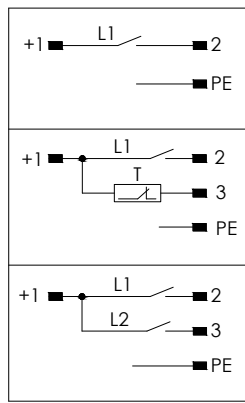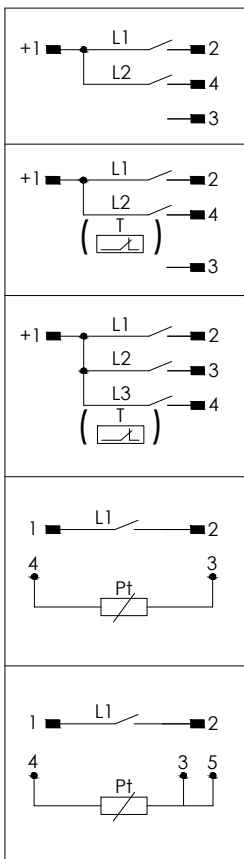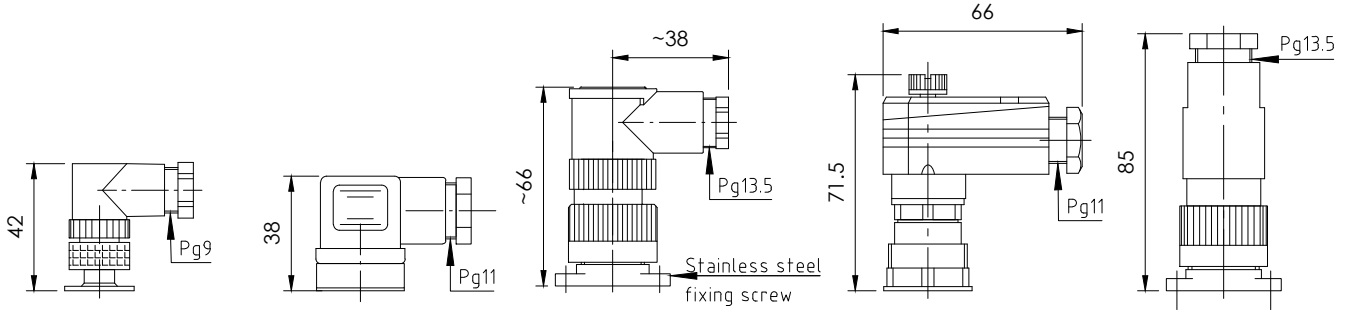

Circuit diagram
02 = fixed-changeover / 04 = adjustable-changeover

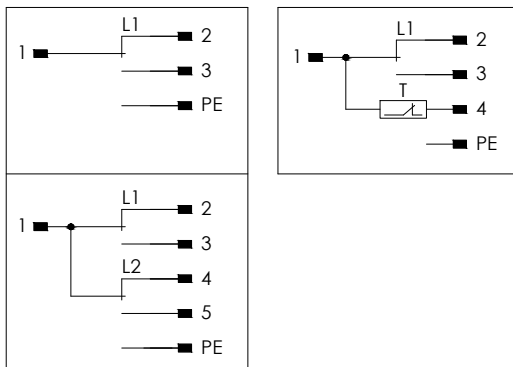

Circuit diagram
02 = fixed-changeover /
04 = adjustable-changeover

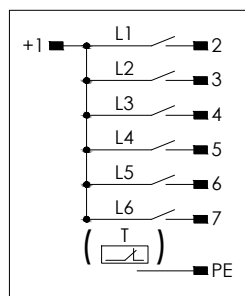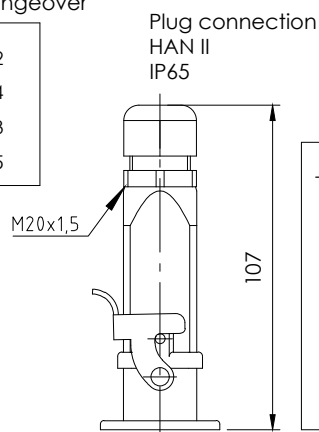

Plug connection
HAN I
IP65

