


NR 1" - 1 1/4"

Level regulator for tank insert

serial No. Date
IN - GB - 112 - 11/25

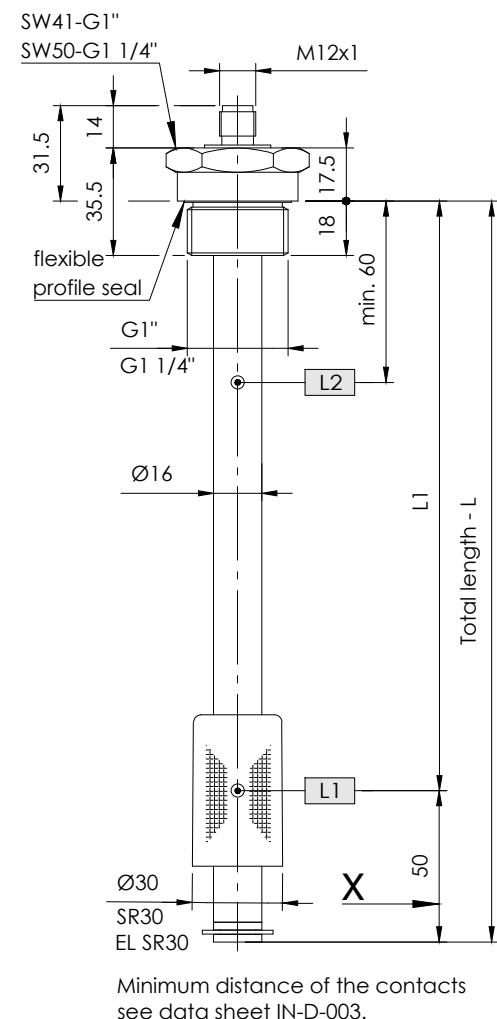

Order code

Specimen order

NR1"-SR30-L370-03-L1/300/S-T70Ö-MS-M12-24V

Tank
connection:
G1"
G1 1/4"

Float type
SR30
EL SR30

Total length-L
of switching tube(mm)

Level contact type
OK=cordless contact (max.500mm)
01 = fixed, plain
02 = fixed, changeover
03 = adjustable, plain
04 = adjustable, changeover
(max. 2 functions)

for VA=stainless steel
only contacts 01, 02

Switching point L1-L3/
mm from sealing edge
Ö = break
S = make
W = changeover
Function with
increasing level

Pt100
Pt1000
Thermal contact
T10Ö
T40Ö
T50Ö
T60Ö (S) (Ö)
T70Ö (S) preferred
T80Ö (S)
T90Ö
(Indicate T1... - T2... for
two thermal contacts)

Plug socket connector:
M12 - 24V
6+PE-DIN 43651
3+PE-DIN 43650
3 pol. + PE

Operating voltage
VDC 10-36 = 24V
VAC 10-230 = 250V

Execution:
MS -Brass
VA - Stainless steel,
connecting thread,
switching tube

X = L1 - L3 + 1 Thermal contact + 70mm
L1 - L2 + 2 Thermal contacts + 90mm
L1 - L3 + Pt100 / 1000 + 55mm
When ordering Pt100 / 1000
indication of connection II / III / IV- conductors.

Description

The level regulator type NR 1" - 1 1/4" for tank insert is a solenoid switch operating without contact with the function of monitoring and regulating liquid levels and temperatures. The switching tube contains bistable protective gas contacts. They may be fixed or alternatively mounted as an adjustable contact cartridge on a perforated strip. For fixed contacts, the contact intervals and their functions must be given. Plain contact cartridges can be subsequently adjusted for height. The function of make or break can then be altered by turning the cartridge through 180° degrees. The permanent magnet built into the float switches the contacts when the level changes. The switching difference (hysteresis) is 4 mm. For temperature monitoring and regulation, thermal elements such as Pt100 / Pt1000 and thermal contacts can be additionally incorporated. The level controller is maintenance - free when nondeposit media are used. For inductive loads, a protective circuit must be provided (free-wheeling diode / RC element). The device must only be installed by specialists.

Max. viscosity 150mm²/S

Technical data

Switching tube	Brass (MS), Stainless steel (VA) max. L = 1500mm
Connection	MS / VA : G 1", SW41 MS / VA : G 1 1/4", SW50
Nominal pressure	1 bar max.
Temperature of medium	100°C max.
Float	Hart Pu, type: SR30 Ceramic, type ELSR30
Medium density	0,80 kg/dm ³ min.
Level contacts	bistabil, make / break / changeover optional fixed or adjustable
Operating voltage	250V AC /DC max.
Contact details	Datasheet: IN-D-003 / 004
Thermal elements	Pt100 / Pt1000 DIN EN 60751 Datasheet: IN-D-005
Thermal contacts	Switchpoint: ± 5K Hysteresis: 20K ± 5K
Number of functions	max. 4 can be incorporated
Mounting position	vertical ± 30°

Technical data



GOLDAMMER
REGELUNGSTECHNIK GMBH

SCHÖLLERSHEIDER STR. 15
POSTFACH 10 02 17
D-40802 METTMANN

TELEFON 02104/12093
TELEFAX 02104/12028

www.Goldammer-Regelungstechnik.com
info@goldammer-regelungstechnik.com

Level regulator


Plug variants and terminal pin assignment

serial No. Date
IN - GB - 112 - 11/25


Standard pin assignment

Function with increasing level / temperature


Plug connection
M12 IP67
5-polig





Plug connection
6+PE IP65
EN 175201-804
(DIN 43651)






Plug connection
3+PE IP65
EN 175301-803
(DIN 43650)




Plug connection
3 pol.+PE
IP67

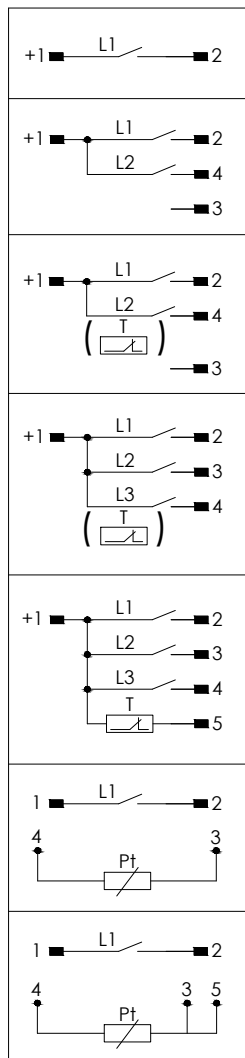

Circuit diagram
02 = fixed-changeover /
04 = adjustable-changeover

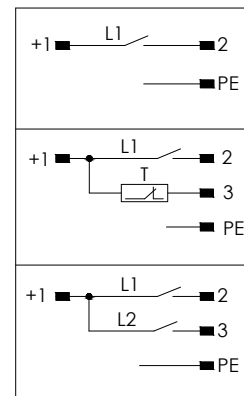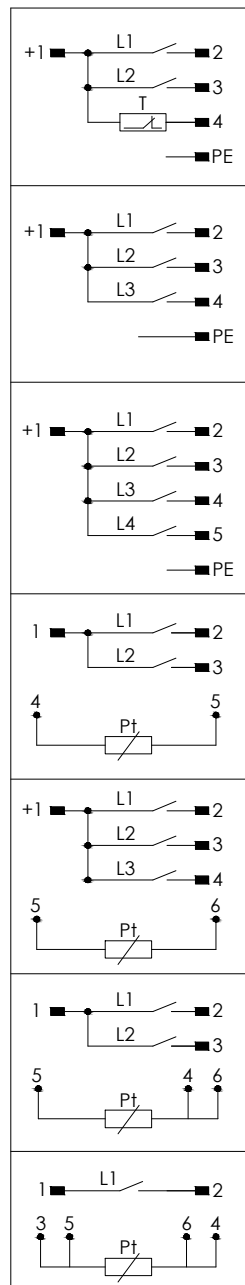

Plug assignment
Level + Thermal contacts
L + T1 + T2

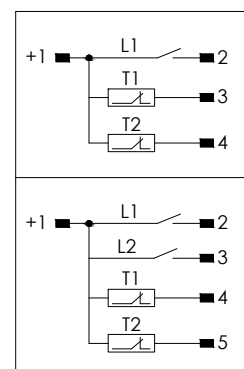

Circuit diagram
02 = fixed-changeover / 04 = adjustable-changeover

